

INDOOR

interior

**ALCANTARA®**



4083 GRAYSH




2627 CAMEO BROWN



8907 CHIANTI



1096 BLOOM

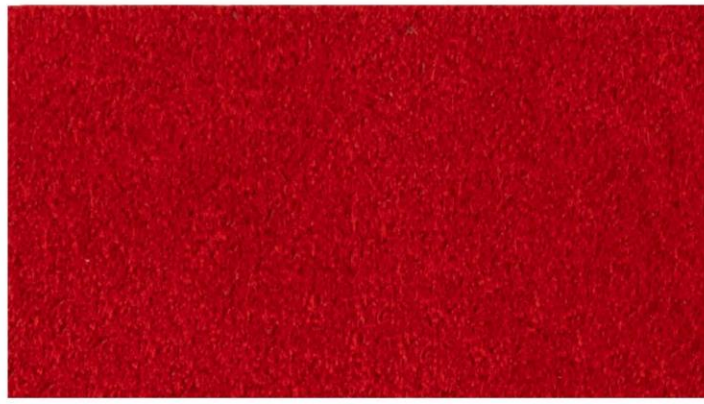

3096 GOYA RED



8801 POMPEIAN RED



4084 PALM



4131 ORANGE



3335 AMARETTO




4180 TAUPE



4025 CADMIUM



7569 AUBERGINE

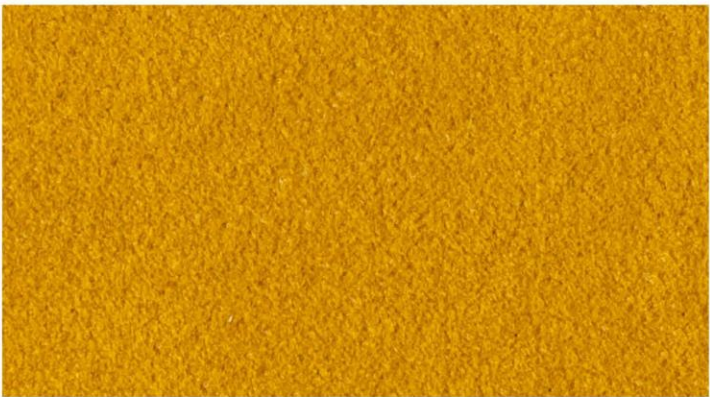

1016 CURRY



4077 DARK CAMEL



7564 PALISSANDRO



1234 ANDY



1605 SADDLE



5141 STRING



3051 CAMEL



4061 PRALINE



7801 BROWN

**ALCANTARA®**



4175 PORCELAIN



6408 INFANTA



6503 COMMODORE



2129 AUBUSSON



3490 BABY GREY



7941 NAVY



2156 CELADON



6801 NILE



7586 BOHEMIAN



1400 STONE



7912 BRITTANY



6601 VIOLET



3470 VELVET



6440 POWDER



6406 SEA



2536 LUNARGLIDE



6404 CHIC



7520 METEORITE

**ALCANTARA®**




1105 NEVE



1042 ICE



3003 KOALA

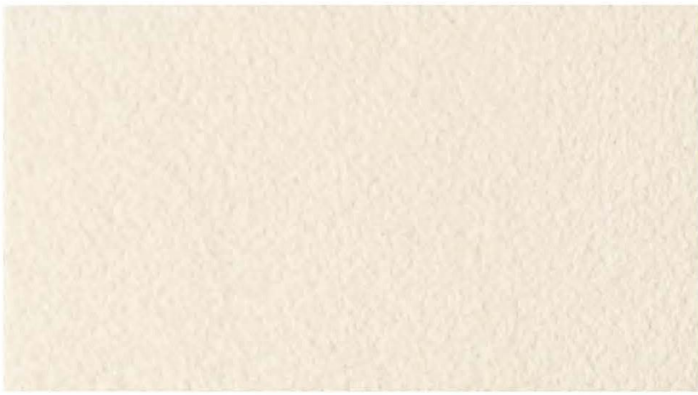


1001 EGGSHELL



1150 IVORY



1100 SEA SAND

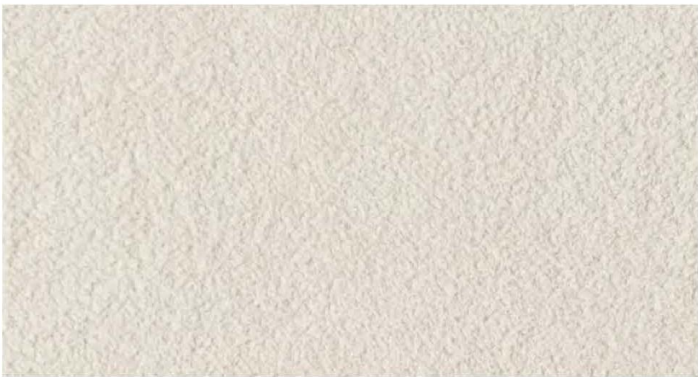

1267 SILICA



1254 DUNE



1110 AMBER GLOW



1112 DOVE



1070 CORN




4900 TERRA



7290 MUSCATTE



7490 CHESTNUT

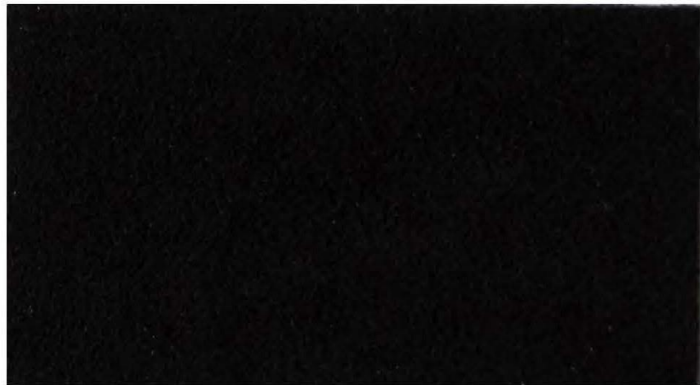

9990 NOTTE



6422 ANTHRACITE



7010 ULTRA UMBER



9901 SLATE BLACK

**ALCANTARA®**



4078 PEARL



3410 SILVER



3801 WHALE



5810 STEEL



9165 MONKFISH



6407 KIWI



5700 LIZARD



6405 LICHEN



7711 MALACHITE



4129 EMERALD



6501 TREKKING



1598 BURRO



2161 ALMOND



1153 GOLD



6475 TEAL



P100 DENIM



P110 AVIO



P010 CONCRETE



P000 FLEECE



P200 FI AX



P210 MOCHA

**ALCANTARA®**

**Cod. 5015**

|             |                                     |
|-------------|-------------------------------------|
| Application | Wall covering, Interior decorations |
|-------------|-------------------------------------|


## COMPOSITION

|            |                |               |
|------------|----------------|---------------|
| ALCANTARA® | Polyester      | 68 ± 3 %      |
|            | Polyurethane   | 32 ± 3 %      |
|            |                | 0.83 ± 0.1 mm |
|            | UNI EN 29073-1 | 230 ± 30 g/m2 |

THICKNESS

UNIT WEIGHT

## GENERAL WASHING

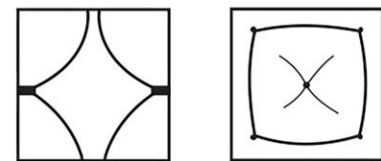**Cod. 5763**

|             |                        |
|-------------|------------------------|
| Application | Contract wall covering |
|-------------|------------------------|



## COMPOSITION

|            |              |          |
|------------|--------------|----------|
| ALCANTARA® | Polyester    | 68 ± 3 % |
|            | Polyurethane | 32 ± 3 % |

FR TREATED


THICKNESS

UNIT WEIGHT

## FLAME RESISTANCE

|               |                         |            |
|---------------|-------------------------|------------|
| Wall Covering | EN 15102:2007 + A1:2011 | CE Marking |
| Euroclass     | EN 13501-1: 2009        | B-s2, d0   |

## GENERAL WASHING

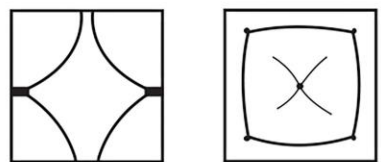**Cod. 5056**

|             |                      |
|-------------|----------------------|
| Application | Marine wall covering |
|-------------|----------------------|



## COMPOSITION

|            |              |          |
|------------|--------------|----------|
| ALCANTARA® | Polyester    | 70 ± 3 % |
|            | Polyurethane | 30 ± 3 % |

FR TREATED


THICKNESS

UNIT WEIGHT

## FLAME RESISTANCE

|                             |              |
|-----------------------------|--------------|
| IMO RES A653 (ISO 5658)     | Complies     |
| Calorific value ( ISO 1716) | ≤ 44.9 MJ/m2 |
| Smoke Density (ISO 5659/2)  | ≤ 200        |

## GENERAL WASHING

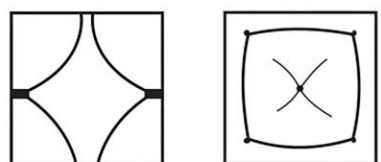

# ALCANTARA®

Alcantara® Avant  
Alcantara® Avant EVOlution


Cod. 5466

Application Upholstery Aviation / Contract / Marine



MAIN CHARACTERISTICS

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                            |                |            |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| COMPOSITION      | ALCANTARA®                                                                                                                                                                                                                                                                                                                                                                                                                 | Polyester      | 68 ± 3 %   |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                            | Polyurethane   | 32 ± 3 %   |
| FR TREATED       | Backing                                                                                                                                                                                                                                                                                                                                                                                                                    | Cot/Kanecaron® | 45/55 %    |
|                  | YES                                                                                                                                                                                                                                                                                                                                                                                                                        |                |            |
| THICKNESS        |                                                                                                                                                                                                                                                                                                                                                                                                                            |                | ≥ 0.95 mm  |
| UNIT WEIGHT      |                                                                                                                                                                                                                                                                                                                                                                                                                            | EN 29073-1     | ≥ 435 g/m2 |
| FLAME RESISTANCE |                                                                                                                                                                                                                                                                                                                                                                                                                            | BS 5852 Crib 5 | Complies   |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                            | IMO RES A652   |            |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                            | FAR/JAR 25.853 |            |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                            |                |            |
| GENERAL WASHING  |      |                |            |



Alcantara® Multilayer


Cod. 5170

Application Upholstery



MAIN CHARACTERISTICS

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |               |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------|
| COMPOSITION     | ALCANTARA®                                                                                                                                                                                                                                                                                                                                                                                                                           | Polyester      | 71 ± 3 %      |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                      | Polyurethane   | 29 ± 3 %      |
| THICKNESS       |                                                                                                                                                                                                                                                                                                                                                                                                                                      |                | 1.2 ± 0.2 mm  |
| UNIT WEIGHT     |                                                                                                                                                                                                                                                                                                                                                                                                                                      | UNI EN 29073-1 | 390 ± 60 g/m2 |
| FLAMMABILITY    | California Technical Bulletin 117:2013 Section 1                                                                                                                                                                                                                                                                                                                                                                                     |                |               |
| GENERAL WASHING |      |                |               |



Alcantara® “EVOlution” versions (available upon request) are produced with partially bio-based polyester. Bio-based content, according to ASTM D6866-20, is reported in the product technical specifications.

Alcantara.com



Alcantara S.p.A.  
via Mecenate, 86  
20138 Milano (Italy)  
Telephone +39 02 580301

Cod. Y503AUTO23

Advertising material not for sale  
Alcantara® is a registered trademark of Alcantara S.p.A.